

## MORE THAN SAFE!

Manufacturer: Lu 'an Babyface Children Products Co. LTD

ADD: Hesheng Mold Industrial Park, 88 Renmin Road,  
Jinzhai Economic Development Zone (Modern Industrial Park),  
Lu 'an City Anhui Province, China


BV001

125-150cm



UNIVERSAL BOOSTER CUSHION  
Waist Cushion (optional)




## STRUCTURE NAME

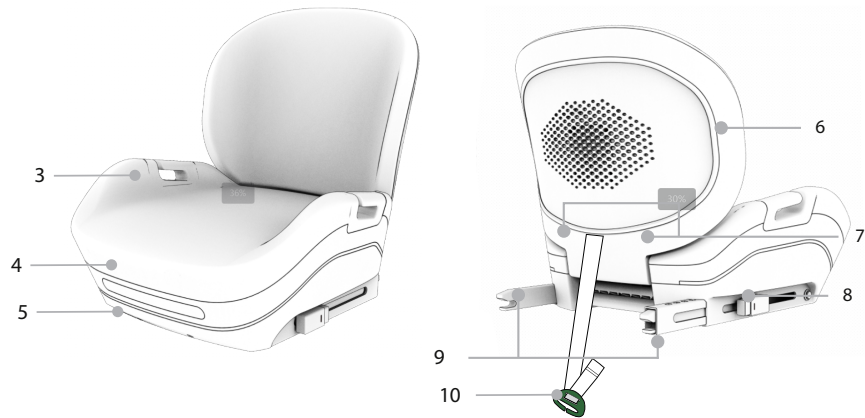

- 1 ISOFIX Insertion Aids (vehicle)
- 2 ISOFIX Fastening Points (vehicle)
- 3 Armrests
- 4 Seat Cover
- 5 Base
- 6 Waist Cushion (optional)
- 7 Release Buttons
- 8 ISOFIX Buttons
- 9 ISOFIX Locking Arms
- 10 Vehicle Belt Clip
- 11 Seat Cover R-elf




# INSTALLATION





ISOFIX 1

2 Using

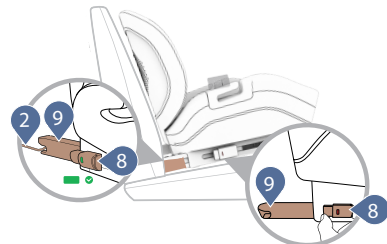

2





3 Waist Cushion



3

## APPROVAL

These instructions use the following symbols:

Symbol	Keyword	Explanation
	DANGER!	RISK of severe personal injury
	WARNING!	RISK of minor personal injury
	CAUTION!	RISK of material damage
	TIP!	Useful notes


The T005F is exclusively intended to secure your child in your vehicle.


Tested and approved according to ECE R129		
Body size	Installation method	Installation direction
125-150cm	Belt+Isofix	Facing forwards
	Belt	

\*ECE=European Standard for Child Safety Equipment

The child safety seat has been designed, tested and approved according to the requirements of the European Standard for Child Safety Equipment (ECE R129/03).

The seal of approval "E" (in a circle) and the approval number are located on the orange approval label (sticker on the child safety seat).

 **DANGER!** This certification will be invalidated if you make any modifications to the child safety seat. Only the manufacturer is permitted to make modifications to the child safety seat. Unauthorised technical changes can cause the protective function of the seat to be reduced or completely eliminated. Do not make any technical changes to the child safety seat.

 **DANGER!** Use the T005F UNIVERSAL BOOSTER CUSHION exclusively for securing your child in your vehicle. It is in no way suitable for using as a seat or toy at home.

## USE IN THE VEHICLE

Please refer to the vehicle handbook information about vehicle seats which are certified for the use of children's restraining systems according to ECE R16.


During use, be sure to observe any restrictions relating to airbags.

You can use your child safety seat as follows:

Facing forwards (in the direction of travel)	Yes
With 2-point safety belt	No
With 3-point safety belt	Yes
On seats featuring: ISOFIX fastenings	Yes



125-150cm



When using as universal booster CUSHION (125 -150cm). This ECRS is suitable for seat belt models equipped with the 3-point seat belts that has passed the ECE R16 requirement and is not suitable for models only equipped with 2-point seat belts.

1. Facing forwards 125-150cm: If there is a passenger airbag: Slide the passenger seat well backwards and follow any relevant directions in your vehicle handbook, please ensure that the airbag is deactivated.

(Please observe the applicable regulations in force in your country)

## 1. ISOFIX

1.If your vehicle is fitted with [ISOFIX Insertion Aids \(1\)](#) as standard, clamp the two [ISOFIX Insertion Aids \(1\)](#), which are included in the scope of delivery of the seat , with the opening pointing upwards, to the two [ISOFIX Fastening Points \(2\)](#) of your vehicle.

---

**TIP!** The ISOFIX fastening points are located between the surface and the backrest of the vehicle seat.

---

2.Press the [ISOFIX Buttons \(8\)](#) to push out the two [ISOFIX Locking Arms \(9\)](#) from the seat base.

3.Push back the child safety seat until the child safety seat is firmly against the vehicle seat then you hear a clicking sound which indicates they are fully engaged. And on both sides of the ISOFIX indicator turn in to green safety color.

4.Move the child safety seat backwards and push the [Waist Cushion \(9\)](#) against the vehicle seat.

---

**TIP!** Release button towards each other to loosen the ISOFIX fastening point on both sides. Move the ISOFIX locking arms back into the seat base, it can protect ISOFIX.

---

## 2. Using

ISOFIX+Adult safety-belt or Adult safety-belt only.

1.Place the universal booster cushion on the vehicle seat. If you don't have ISOFIX, please ignore this Step. Install the universal booster cushion with the vehicle belt.

2.Let's the child in the universal booster cushion. Pull out the belt from the belt ALR (Automatic Locking Retractor ).

3.Guide the diagonal belt into the [Vehicle Belt Clip \(10\)](#) as shown, please guide the diagonal belt into it , and adjust the length of the strap to make the diagonal belt slightly higher than the child's shoulder. When fasten the vehicle belt, making sure the lap belt passes under both [Armrests \(3\)](#), while the diagonal belt is above the armrest.

---

**TIP!** Keep the diagonal belt at the position of belt guidance between the outside of the neck and shoulder (in the middle of point a and point b).

---

---

**WARNING!** The vehicle belt must not be twisted or have their places changed over.

---

Pull the strap, adjust the height of the [Vehicle Belt Clip \(10\)](#) to adapt to children of different heights.

---

**TIP!** The importance of ensuring that any lap vehicle seat belt is worn low down, so that the pelvis is firmly engaged, shall be stressed.

---

Lock the tip of the buckle into the vehicle seat buckle with a clicking sound. Follow the direction of arrow to tighten belt, and put redundant belt into ALR. Shake the child safety seat to make sure it is securely attached.

---

**TIP!** The diagonal vehicle seat belt section must run diagonally backward. You can adjust the course of the belt with your vehicle's ALR on both sides.

---

## 3. Waist Cushion

1.Raise the [Waist Cushion \(6\)](#) at 90 degree angle. Insert the two plastic tongues of the [Waist Cushion \(6\)](#) back to the connection hole of the base.

2.If you want to separate them , press the [Release Button \(7\)](#) by your finger.

Whether you remove the [Waist Cushion \(6\)](#) or not, using method is the same.

If you don't have [Waist Cushion \(6\)](#), please ignore it .

## CARE AND MAINTENANCE

Universal booster cushion

Only use authentic T005F seat covers. The seat cover is an integral part of the universal booster cushion and is key to ensure the trouble-free functionality of the system.

Replacement seat covers are available from your dealer.

The cover can be removed and washed with a mild detergent on a washing.

The plastic parts can be cleaned with soapy water. Do not use any caustic cleaning agents (such as solvents).

**TIP!** Use seat cover R-elf to assemble cover more easily.



## DISPOSAL

Please observe the waste disposal regulations in your country.

Disposal of packaging	Container for cardboard boxes
Seat cover	Residual waste, waste incineration
Plastic parts	To be placed in the corresponding container according to labelling
Metal parts	Container for metals

## SAFETY NOTES

### NOTICE

This is a Universal booster cushion Enhanced Child Restraint System. It is approved according to UN Regulation No.129, for use in i-Size compatible and universal vehicle seating positions as indicated by vehicle manufacturers in the vehicle user's manual.

If in doubt, consult the Enhanced Child Restraint System manufacturer or the retailer.

### **⚠ DANGER!**

Please carefully read and make sure you understand all instructions in this manual and in the vehicle handbook relate to child safety seats. Install and use the child safety seat as described in the instruction manual. Failure to do this could result in serious injury even death of your child. Keep the instructions together with the ECRS for future reference.

MAKE SURE any straps holding the ECRS to the vehicle should be tight. Any straps restraining the

child should be adjusted to the child's body. Make sure straps should not be twisted.

MAKE SURE the lap vehicle seat belt must be worn in such a way as to properly secure the pelvis of the child.

MAKE SURE the ECRS is changed when it has been subject to violent stresses in an accident.

MAKE SURE the rigid items and plastic parts of a ECRS shall be so located and installed that they are not liable, during everyday use of the vehicle, to become trapped by a movable seat or in a door of the vehicle.

DO NOT make any alteration or additions to the ECRS without the approval of the Type Approval Authority, or a danger occurs if not following closely the installation instructions provided by the child restraint manufacturer.

HOT! The child seat should be kept away from sunlight if the seat is not provided with a textile

cover, otherwise it may be too hot for the child's skin.

DO NOT leave your child unattended in this restraint even for a short time.

MAKE SURE any luggage or other objects liable to cause injuries in the event of a collision shall be properly secured.

A) DO NOT use the ECRS without the cover.

B) DO NOT replace seat cover with any other than the one recommended by the manufacturer, because the cover constitutes an integral part of the restraint performance.